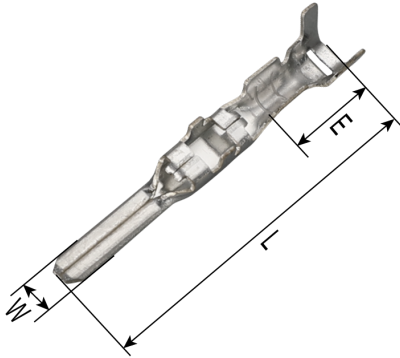



2.2 系列(铜件配套)

2.2 Series

A



B



技术参数 Specifications

使用线数(Hole count): 2 3 4 6 9

温度范围 (Temperature range): -25℃ ~ 85℃

额定电压 (Rated voltage):300V. AC/DC

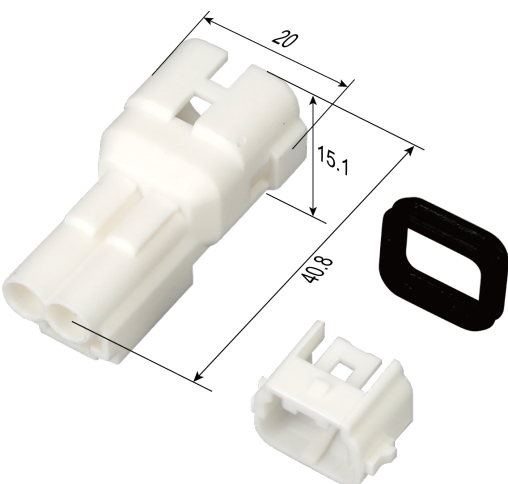
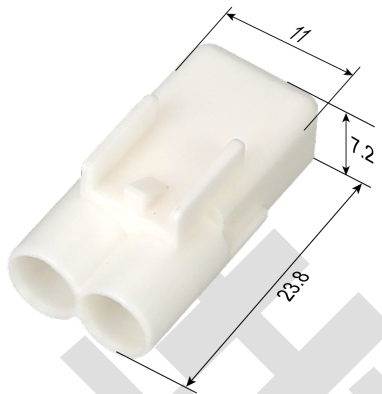
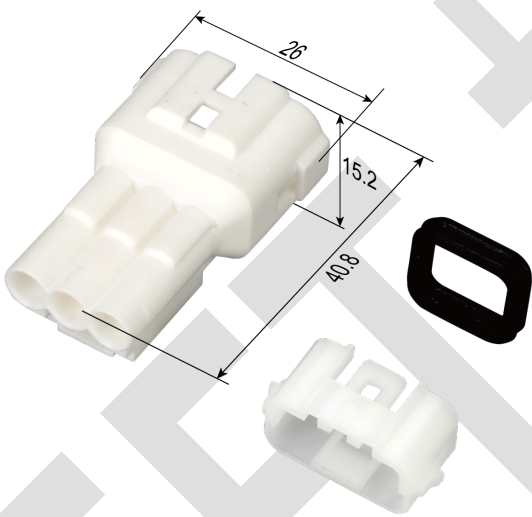
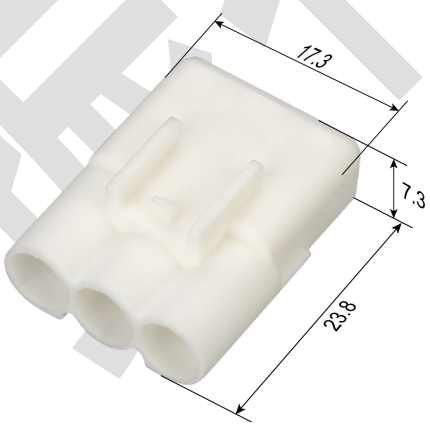
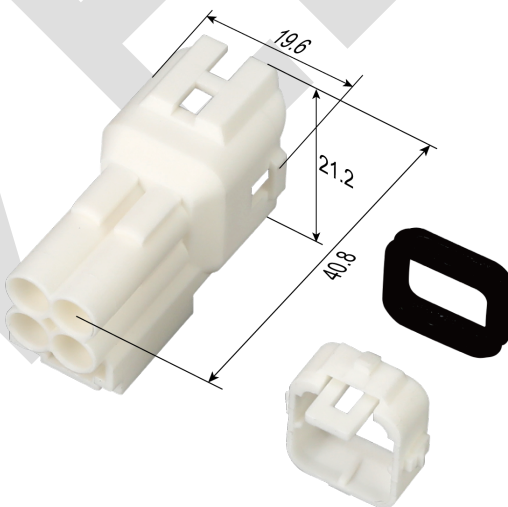
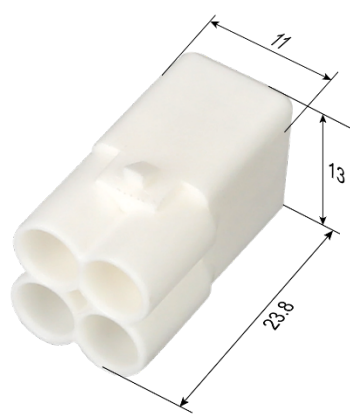
额定电流 (Rated current): 5A

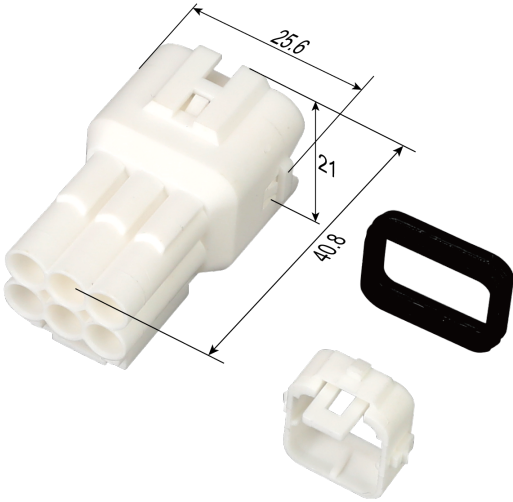
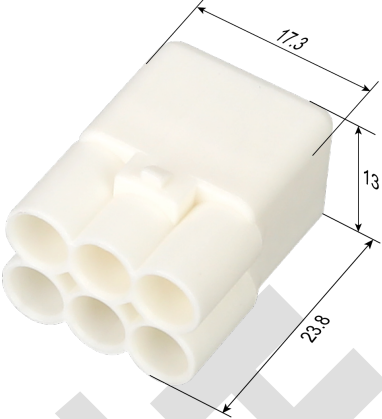
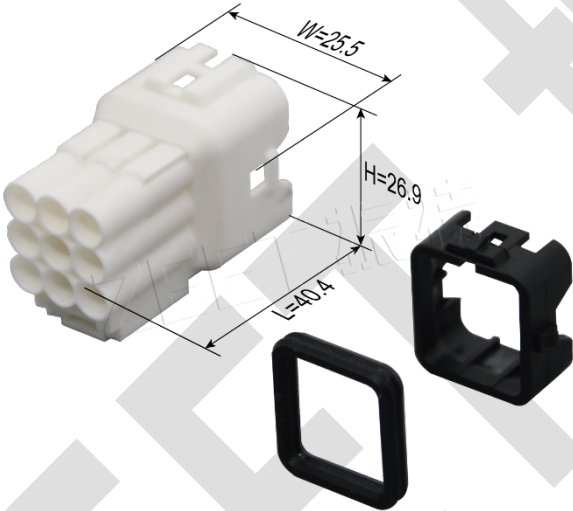
端子 Terminal

型号 Type	图号 Pic	压线范围 Wire Range		厚度 Thickness	材质 Material	尺寸 Dimension (mm)			对照表 Comparison No.	备注 Remark
		AWG#	mm ²			L	W	E		
ZT-2.2PT	A	18~16	0.7~1.2	0.3	黄铜	24	2.2	7.2	插头	
ZT-2.2RT	B	18~16	0.7~1.2	0.25	黄铜	16.5	3	7.2	插座	

塑料件 Plastic parts

线数 Hole count	插头 Plug for male terminal	插座 Receptacle for female terminal
2	DJ7021-2.0-11	DJ7021-2.0-21
	Technical drawing of the male plastic part DJ7021-2.0-11. It shows a white plastic component with two holes. Dimensions are indicated: 19.3 for the top width, 14 for the top height, 36.9 for the bottom length, and a black O-ring is shown next to it.	Technical drawing of the female plastic part DJ7021-2.0-21. It shows a white plastic component with two holes. Dimensions are indicated: 11.9 for the top width, 7.4 for the top height, and 23.5 for the bottom length.

2	DJ7021-2.2-11 	DJ7021-2.2-21 
3	DJ7031-2.2-11 	DJ7031-2.2-21 
4	DJ7041-2.2-11 	DJ7041-2.2-21 
6	DJ7061-2.2-11	DJ7061-2.2-21

		
9	DJ7091-2.2-11 	DJ7091-2.2-21 